
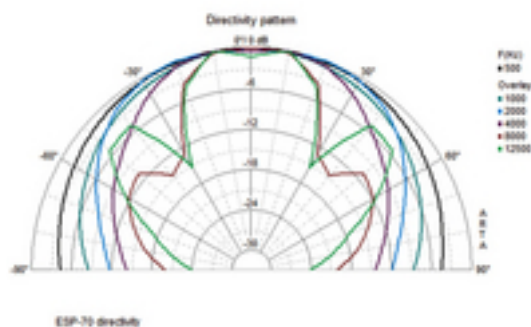


ESP-70/WS - PA Wall Speaker

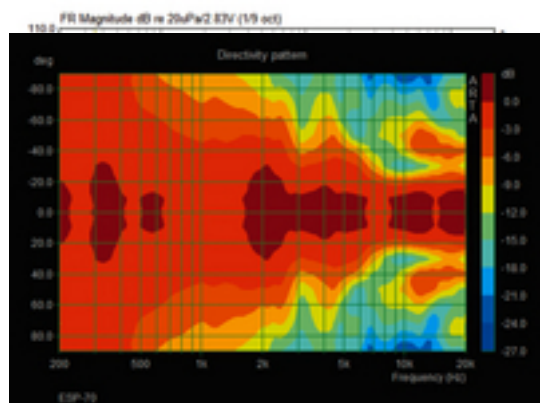

PA wall speaker

- 100 V line technique
- 5-step rotary switch for 10/6/4/2 W/off
- Rotary switch can be replaced with a cover plate to avoid accidental changing of the power selection
- Emergency priority relay
- White wooden cabinet with protective metal grille
- Easy wall mounting via supporting plate
- Ball-proof according to DIN 18032, Part 3

Tekniset tiedot:

| | |
|--------------------------------|---------------------|
| Active/passive | : passive |
| Transmission method | : 100 V |
| Total output power | : - |
| Power rating (RMS) | : - |
| Total power rating | : - |
| Power rating (RMS) | : 10/6/4/2 W |
| Impedance | : - |
| Frequency range | : 95-19,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : - |
| System | : - |
| Full range speaker | : - |
| Bass speaker | : - |
| Midrange speaker | : - |
| Tweeter | : - |
| Number of speakers | : - |
| Speaker size | : - |
| Sensitivity | : - |
| Max. rated SPL | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Features | : - |
| Housing material | : wood |
| Colour | : white |
| Mounting device | : - |
| Protected against ball rebound | : yes |
| Protection class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Power supply | : - |
| Dimensions | : 300 x 200 x 90 mm |
| Width | : 300 mm |
| Height | : 200 mm |
| Depth | : 90 mm |
| Weight | : 2.3 kg |



| | |
|------------------------|-----|
| Inputs | : - |
| Outputs | : - |
| Replacement voice coil | : - |
| Other features | : - |
| Accessories | : - |