


# TS-C20-500/T - PA Speaker Column

100V

EN  
54



IP66

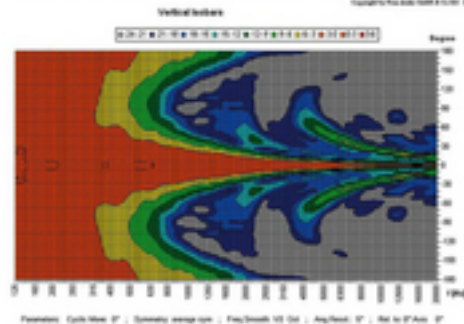

Weatherproof PA column speaker,  
with EN 54-24 certification.

- 100 V line technique

- 
- 4 x 7.7 cm (3") waterproof full range speaker
  - 4 power taps: 20/15/10/5 W
  - Connection via ceramic terminals with thermal fuse in the cabinet
  - 2 x PG9 cable gland
  - Robust, plastic-coated aluminium cabinet with front protective grille
  - The speaker complies with British Standard BS 5839, part 8
  - Supplied with plastic wall bracket for pivoting and tilting

## Tekniset tiedot:

|                                |                             |
|--------------------------------|-----------------------------|
| Active/passive                 | : passive                   |
| Transmission method            | : 100 V                     |
| Total output power             | : -                         |
| Power rating (RMS)             | : -                         |
| Total power rating             | : -                         |
| Power rating (RMS)             | : 20/15/10/5 W              |
| Impedance                      | : -                         |
| Frequency range                | : 200-17,000 Hz             |
| THD                            | : -                         |
| S/N ratio                      | : -                         |
| Input signal                   | : -                         |
| System                         | : -                         |
| Full range speaker             | : 4 x 77 mm                 |
| Bass speaker                   | : -                         |
| Midrange speaker               | : -                         |
| Tweeter                        | : -                         |
| Number of speakers             | : 4                         |
| Speaker size                   | : -                         |
| Sensitivity                    | : 97 dB/W/m                 |
| Max. rated SPL                 | : 109 dB                    |
| Radiation angle, horizontal    | : 149°                      |
| Radiation angle, vertical      | : 38°                       |
| Features                       | : -                         |
| Housing material               | : aluminium                 |
| Colour                         | : white aluminium, RAL 9006 |
| Mounting device                | : wall bracket              |
| Protected against ball rebound | : -                         |
| Protection class               | : IP66                      |
| Admiss. ambient temp.          | : -20 °C to +90 °C          |
| Power supply                   | : -                         |
| Dimensions                     | : 100 x 510 x 92 mm         |
| Width                          | : 100 mm                    |
| Height                         | : 510 mm                    |
| Depth                          | : 92 mm                     |
| Weight                         | : 2.8 kg                    |

---

|                        |     |
|------------------------|-----|
| Inputs                 | : - |
| Outputs                | : - |
| Replacement voice coil | : - |
| Other features         | : - |
| Accessories            | : - |