


DRIVE-15A - PA DSP Loudspeaker

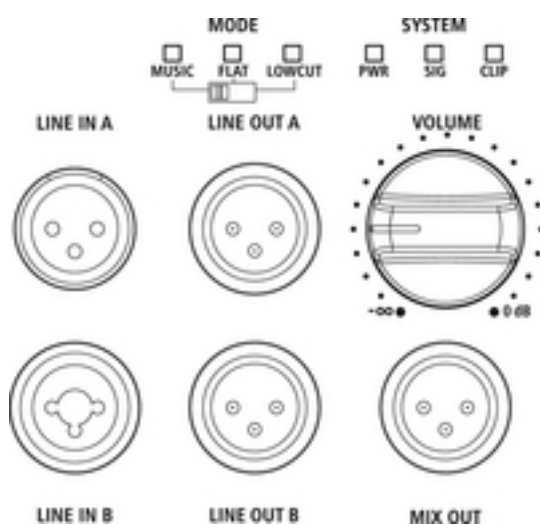

With the DRIVE series you will get robust and easy-to-use PA speakers which are suitable for versatile applications and feature the latest DSP-controlled amplifier technology. There are 3 selectable presets available to provide a perfect sound adjustment for any kind of application. These robust and high-quality cabinets made of birch plywood are suitable for general use. The arrangement of the handles allow for easy manageability. Professional active DSP speaker system with 2-channel amplifier, 360 W

- Compact 15/2 full range system with cabinet made of birch plywood

- DSP-controlled 2-channel amplifier (bass: class D, tweeter: class A/B)
- 3 selectable presets
- FLAT (linear adjustment)
- MUSIC (slightly raised bass and treble)
- LOW CUT (with high-pass filter for application with an additional subwoofer)
- 38 cm (15") bass speaker and 25 mm (1") horn tweeter, can be turned by 90°
- Excellent sound characteristics
- High-quality coating and neat workmanship
- Multi-purpose positioning and installation options
- Horn tweeter with consistent radiation pattern
- M8 threaded inserts for suspended installation, stand sleeve
- Volume control
- 2 x balanced line in
- 2 x parallel line out
- 1 x balanced mix out
- Power and clip indicator

Tekniset tiedot:

| | |
|--------------------------------|---------------------------------------------------------------|
| Active/passive | : active |
| Transmission technology | : cable |
| Total output power | : 750 W |
| Power rating (RMS) | : DSP-controlled 360 W (300 + 60) bass: 300 W treble: 60 W |
| Total power rating | : - |
| Power rating (RMS) | : - |
| Impedance | : - |
| Frequency range | : 40-20,000 Hz |
| THD | : - |
| S/N ratio | : - |
| Input signal | : 790 mV/40 kOhm (line, bal.) |
| System | : 15/2 full range |
| Full range speaker | : - |
| Bass speaker | : 38 cm (15") bass speaker |
| Midrange speaker | : - |
| Tweeter | : 25 mm (1") horn tweeter |
| Number of speakers | : 2 |
| Speaker size | : 38 cm (15") |
| SPL | : 98 dB/W/m |
| Max. rated SPL | : 125 dB |
| Beam angle | : H: 90°/V: 60°, horn can be turned |
| Radiation angle, horizontal | : 90° |
| Radiation angle, vertical | : 60° |
| Features | : - |
| Housing material | : birch plywood |
| Colour | : black |
| Mounting device | : M8 threaded inserts, stand sleeve |
| Protected against ball rebound | : - |
| Protection class | : - |
| Admiss. ambient temp. | : 0-40 °C |
| Power supply | : ∿ 230Â V/50Â Hz/550Â VA |
| Dimensions | : 415 x 695 x 455 mm |
| Width | : 415 mm |
| Height | : 695 mm |
| Depth | : 455 mm |

| | |
|--------------------------------|-----------------------------------------------|
| Weight | : 22.04 kg |
| Inputs | : 1 x comb. XLR/6.3 mm: line 1 x XLR: line |
| Outputs | : 2 x XLR par. out 1 x XLR mix out |
| Replacement voice coil | : - |
| Other features | : DSP-controlled limiter 3 selectable presets |
| Accessories | : - |
| Packing dimensions (W x H x L) | : 0.56 x 0.81 x 0.52 m |
| Gross weight | : 28.07 kg |
| Net weight | : 22.04 kg |