


SA-200 - Amplifier

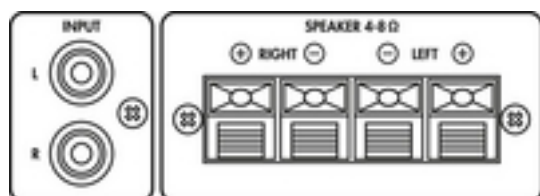

Universal stereo amplifier, 100 W

- Silent operation due to fanless cooling concept
- Stereo line input
- Speaker connection via terminal strip
- LEDs for indicating overload (clip)
- Volume control
- 482 mm (19") rack installation, 1 RS, with supplied mounting brackets

Tekniset tiedot:

Peak output power	: 2 x 100 W
Power rating	: 100 W
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: 2 x 50 W
Power rating at 8 Ohm	: 2 x 30 W
Power rating at 16 Ohm	: -
Power rating at 100 V	: -
Power rating with 4 Ohm	: -
bridged operation	
Power rating with 8 Ohm	: -
bridged operation	
Output impedance	: -
Channels	: 2
Zones	: -
Inputs	: 420Â mV/6Â kOhm
Attenuation factor	: -
Frequency range	: 20-20,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: -
Equalizer midrange	: -
Equalizer treble	: -
S/N ratio	: ? 83 dB
Crosstalk attenuation	: -
THD	: -
Mains voltage	: ∼ 230 V
Mains frequency	: 50 Hz
Power consumption, operation	: 210 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: -
Power supply (possible alternative)	: -
Admiss. ambient temp.	: 0-40 °C
Width	: 431 mm
Height	: 55 mm
Depth	: 255 mm



Rack spaces, RS	: 1
Weight	: 4.4 kg
Connections	: 1 x RCA L/R (line), 4 x spring-load. speaker term.(speakers)