


SP-205/8 - PA Fullrange Speaker

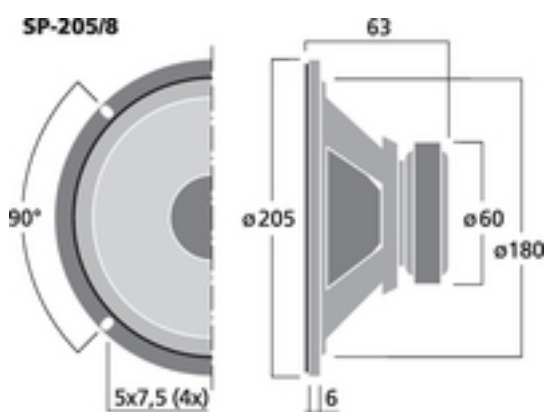

Universal full range speaker, 8 W, 8 Ohm

- Dual cone
- For PA applications and other purposes
- Particularly suitable for multiple arrangements in column speakers
- Excellent sound quality

Klang+Ton 06/2013

“Built into an open cabinet (Cheap Trick 269), this speaker provides features which are clearly above its price class and can clearly be considered high-end. Like all the other full range speakers of this design, it also



needs a break-in period to demonstrate its full capability. After about 6 months, you wouldn't give this speaker back, not even for far more than you paid for it."

Tekniset tiedot:

Impedance (Z)	: 8 Ohm
Transmission method	: -
Frequency range	: f3-18,000 Hz
Resonant frequency (fs)	: 100 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 8 W
Peak music power output (MAX)	: 10 W
Sensitivity	: 94 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X _{MAX})	: -
Eff. cone area (Sd)	: -
Magnet weight	: 79 g
Magnet diameter	: $\tilde{\text{A}}$ 60 mm
Mounting cutout	: $\tilde{\text{A}}$ 180 mm
Mounting depth	: 57 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\text{A}}$ 205 mm x 63 mm
Outside diameter	: $\tilde{\text{A}}$ 205 mm
Width	: $\tilde{\text{A}}$ 205 mm



Height	: -
Depth	: 63 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.379 kg
Packing unit	: 1
Type of speaker	: 8"