
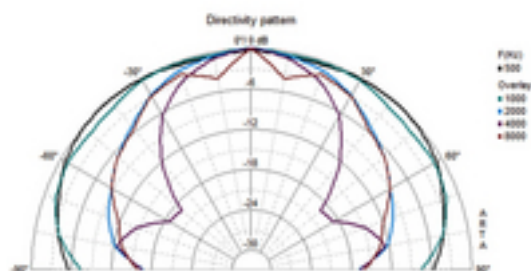


SPE-284/WS - Marine Loudspeaker

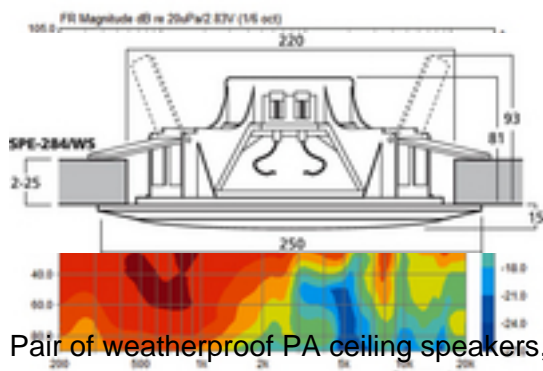

Pair of weatherproof PA ceiling speakers, heat-resistant up to 100 °C.
For applications in saunas and swimming pool areas.

- 2-way system with dome tweeter
- Excellent sound
- White plastic housing
- Weatherproof speaker cone
- Tested according to ASTM B117 (400 h salt spray test)
- For a ceiling thickness from 2 to 25 mm
- Spring-loaded speaker terminals

Tekniset tiedot:

| | |
|---|-----------------------|
| Impedance (Z) | : 4 Ohm |
| Transmission method | : - |
| Frequency range | : 45-20,000 Hz |
| Resonant frequency (fs) | : - |
| Rec. crossov. frequ. (fmax.) (12 dB/oct.) | : - |
| Power rating (RMS) | : 50 W |
| Peak music power output (MAX) | : 100 W |
| Sensitivity | : 89 dB/W/m |
| Max. rated SPL | : - |
| Max. voltage | : - |
| Radiation angle, horizontal | : - |
| Radiation angle, vertical | : - |
| Suspension compl. (Cms) | : - |
| Moving mass (Mms) | : - |
| Mech. Q factor (Qms) | : - |
| Electr. Q factor (Qes) | : - |
| Total Q factor (Qts) | : - |
| Equivalent volume (Vas) | : - |
| DC resistance (Re) | : - |
| Force factor (BxL) | : - |
| Voice coil induct. (Le) | : - |
| Voice coil diameter | : - |
| Voice coil former | : - |
| Linear excursion (X _{MAX}) | : - |
| Eff. cone area (Sd) | : - |
| Magnet weight | : - |
| Magnet diameter | : - |
| Mounting cutout | : Å~ 220 mm |
| Mounting depth | : 85 mm |
| Mounting hole diameter | : - |
| Hole spacing X-axis | : - |
| Hole spacing Y-axis | : - |
| Dimensions | : Å~ 250Å mm x 96Å mm |
| Outside diameter | : Å~ 250 mm |
| Width | : Å~ 250 mm |



| | |
|-----------------------|------------|
| Height | : - |
| Depth | : 96 mm |
| Protective class | : IP65 |
| Admiss. ambient temp. | : 0-100 °C |
| Weight | : 0.95 kg |
| Packing unit | : 2 |
| Type of speaker | : 200 |