
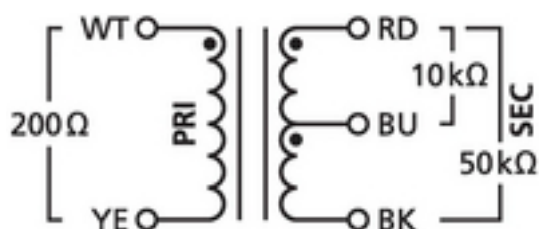


## NTE-10/3 - Audio Transformer

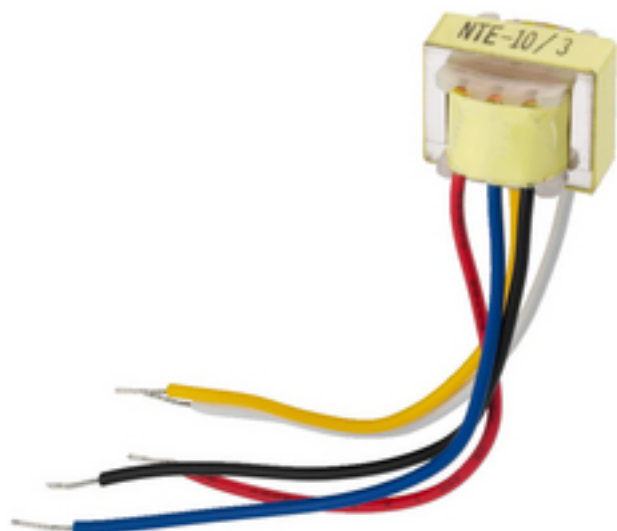

Audio transformer 1:3/1:10 for microphone signals, from NEUTRIK.

- Very compact design, e.g. also suitable for installation into connector housings
- Unshielded version with bare wire connections (70 mm)
- Wideband version
- Balance adjustment
- Galvanic isolation to avoid/eliminate hum loops
- Max. input voltage: 350 mV/380 mV (1% THD/50 Hz)

When installing unshielded transformers into units with interference fields (e.g. power transformers), attention has to be paid to respective shielding measures.

## Tekniset tiedot:

Description	: transformer
Frequency range	: 20-20,000 Hz
Control range	: -
Control frequencies	: -
Input signal	: 380 mV
Input sensitivity	: -
Input impedance	: 200 Ohm
Output signal	: -
Output impedance	: 10 kOhm/50 kOhm
Gain	: -
<b>Phantom power</b>	: -
Compression	: -
Gate ratio	: -
Crossover frequency	: -
High-pass filter	: -
Low cut	: -
Transmission ratio	: 1:3/1:10
S/N ratio	: -
Channel separation	: -
THD	: -
Admiss. ambient temp.	: 0-40 °C
Power supply	: -
Dimensions	: 14 x 11 x 12 mm(w/o cable)
Weight	: 7 g
Inputs	: -
Outputs	: -
Other features	: -
Width	: 14 mm
Height	: 11 mm
Depth	: 12 mm
Length	: -
Rack spaces, RS	: -
Weight	: 7.3 g