


## EDL-65TW - PA Loudspeaker

100V

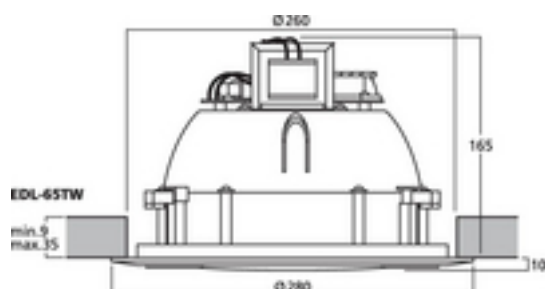

Movable PA ceiling speaker

- 100 V line technique
- High power rating with 30 W max.
- High-quality 2-way coaxial speaker system with 2-way crossover network
- Complete speaker part can be moved for optimising the sound radiation pattern indoors
- Plastic housing of superior design with metal grille
- Plastic material of ABS and self-extinguishing according to UL 94V-0
- For a ceiling thickness from 9 to 35 mm

## Tekniset tiedot:

Impedance (Z)	: -
Transmission method	: 100 V
Frequency range	: 50-20,000 Hz
Resonant frequency (fs)	: -
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: -
Power rating (RMS)	: 30/15/7.5 W
Peak music power output (MAX)	: -
Sensitivity	: 91 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: -
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: -
Mounting cutout	: $\varnothing \sim 260$ mm
Mounting depth	: 165 mm
Mounting hole diameter	: -
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\varnothing \sim 280 \varnothing$ mm x 175 $\varnothing$ mm
Outside diameter	: -
Width	: $\varnothing \sim 280$ mm

Height	: -
Depth	: 175 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 2.38 kg
Packing unit	: -
Type of speaker	: 180