




## MHD-230/RD - Horn Speaker

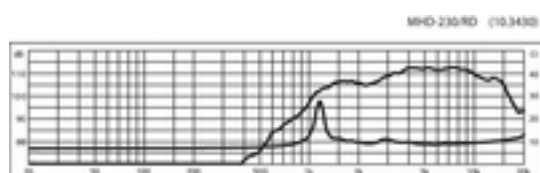

### Horn Tweeters

High-quality workmanship, with robust plastic horns, mainly made of ABS, in some cases glass fibre reinforced.

PA horn tweeter, 40 W, 8 Ohm

- Round horn of perfect workmanship
- Extra high efficiency
- Excellent radiation
- Suitable for any DJ and PA application up to professional use
- Replacement voice coil MHD-230/VC is available at option

## Tekniset tiedot:

Impedance (Z)	: 8 Ohm
Transmission method	: -
Frequency range	: fx-16,000 kHz
Resonant frequency (fs)	: 1,100 Hz
Rec. crossov. frequ. (fmax.) (12 dB/oct.)	: 4,000 Hz
Power rating (RMS)	: 40 W
Peak music power output (MAX)	: 80 W
Sensitivity	: 109 dB/W/m
Max. rated SPL	: -
Max. voltage	: -
Radiation angle, horizontal	: -
Radiation angle, vertical	: -
Suspension compl. (Cms)	: -
Moving mass (Mms)	: -
Mech. Q factor (Qms)	: -
Electr. Q factor (Qes)	: -
Total Q factor (Qts)	: -
Equivalent volume (Vas)	: -
DC resistance (Re)	: -
Force factor (BxL)	: -
Voice coil induct. (Le)	: -
Voice coil diameter	: $\tilde{\sim}$ 25 mm
Voice coil former	: -
Linear excursion (X <sub>MAX</sub> )	: -
Eff. cone area (Sd)	: -
Magnet weight	: -
Magnet diameter	: $\tilde{\sim}$ 80 mm
Mounting cutout	: $\tilde{\sim}$ 90 mm
Mounting depth	: 120 mm
Mounting hole diameter	: 104.6 mm
Hole spacing X-axis	: -
Hole spacing Y-axis	: -
Dimensions	: $\tilde{\sim}$ 120 mm
Outside diameter	: $\tilde{\sim}$ 120 mm
Width	: $\tilde{\sim}$ 120 mm

Height	: -
Depth	: 120 mm
Protective class	: -
Admiss. ambient temp.	: 0-40 °C
Weight	: 0.9 kg
Packing unit	: 1
Type of speaker	: -
Replacement voice coil	: MHD-230/VC